

Layer 3 8-Port 2.5GBASE-T + Multiple 10G Uplink Managed Ethernet Switch




Perfect Managed Multigigabit Ethernet Switch with L3/L2 Switching and Security

PLANET MGS-6311-Series is a brand-new **Layer 3 managed multigigabit switch** providing **2.5Gbps** data over UTP cables, designed for the demand of high-bandwidth required network equipment, such as Wi-Fi 7 (802.11be) wireless APs, NAS, workstation and those with 2.5GBASE-T interfaces. It features **8 10/100/1000/2500BASE-T** copper ports and **2 to 4 extra 1G/2.5G/10GBASE-X SFP+ fiber ports** that are flexibly designed to extend the connection distance.

The MGS-6311 series provides high-density performance, **Layer 3 dynamic routing** - **RIP** (Routing Information Protocol) and **OSPF** (Open Shortest Path First) and **VRRP** (Virtual Router Redundancy Protocol). With 2.5Gbps copper interfaces and 10Gbps fiber-optical interfaces, it can handle extremely large amounts of data in a secure topology linking to an enterprise backbone or high-capacity servers. The powerful network security features make the MGS-6311 series perform effective data traffic control for ISP and enterprise Wi-Fi, video streaming, and multicast applications.

The hardware specifications of these models are shown below:

Models	10/100/1G/2.5GT Copper	100/1G/2.5G/5G/10GT Copper	1G/2.5G/10G SFP+	PoE Ports	Power Input
MGS-6311-8P2X	8	--	2	8at	AC
MGS-6311-8UP4X	8	--	4	8bt	AC
MGS-6311-10T2X	8	2	2	--	AC

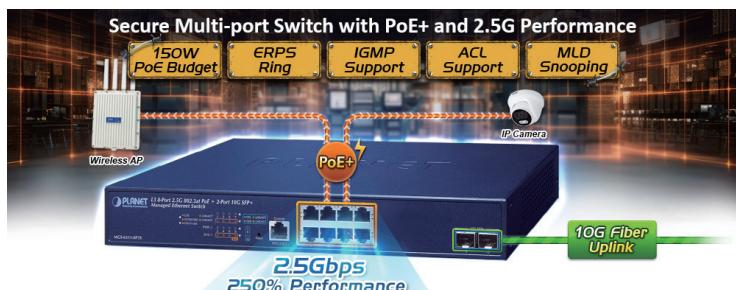

IP Routing Features

- IPv4 routing protocol supports RIPv1/v2 and OSPFv2
- IPv6 routing protocol supports RIPng and OSPFv3
- Routing interface provides per VLAN routing mode
- Supports route redistribution


Layer 2 Features

- Complies with the IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3bz, IEEE 802.3an Gigabit Ethernet standard
- Prevents packet loss flow control
 - IEEE 802.3x pause frame flow control in full-duplex mode
 - Back pressure flow control in half-duplex mode
- High performance Store-and-Forward architecture, broadcast storm control, port loopback detection
- 16K MAC address table, automatic source address learning and aging
- Supports VLAN
 - IEEE 802.1Q tag-based VLAN
 - GVRP for dynamic VLAN management
 - Provider Bridging (VLAN Q-in-Q, IEEE 802.1ad) supported
 - Private VLAN Edge (PVE) supported
 - GVRP protocol for Management VLAN
 - Protocol-based VLAN
 - MAC-based VLAN
 - IP subnet VLAN
- Supports Link Aggregation
 - Maximum 64 trunk groups, up to 8 ports per trunk group
 - IEEE 802.3ad LACP (Link Aggregation Control Protocol)
 - Cisco ether-channel (static trunk)
- Supports Spanning Tree Protocol
 - STP, IEEE 802.1D (Classic Spanning Tree Protocol)
 - RSTP, IEEE 802.1w (Rapid Spanning Tree Protocol)
 - MSTP, IEEE 802.1s (Multiple Spanning Tree Protocol, spanning tree by VLAN)
- Supports BPDU & root guard, BPDU Filtering and BPDU Forwarding.
- Port mirroring to monitor the incoming or outgoing traffic on a particular port (many to many)
- Provides port mirror (many-to-1)
- Supports G.8032 ERPS (Ethernet Ring Protection Switching)

2.5Gbps Capability for Diversified Bandwidth Applications


With the terminal access rates of 802.11ac/ax wireless APs reaching as high as 1.2Gbps to 3.6Gbps, Gigabit ports have been unable to satisfy the demand. Supporting 2.5Gbps capability and 802.3af/at/bt PoE output, the MGS-6311 series can deliver not only data to 802.11ac/ax wireless APs, but also power with the existing CAT5e Ethernet cables to other powered devices such as APs and IP cameras. It can definitely give you the speed you demand and its Plug and Play makes installation easy.

New Generation of Multigigabit Switch

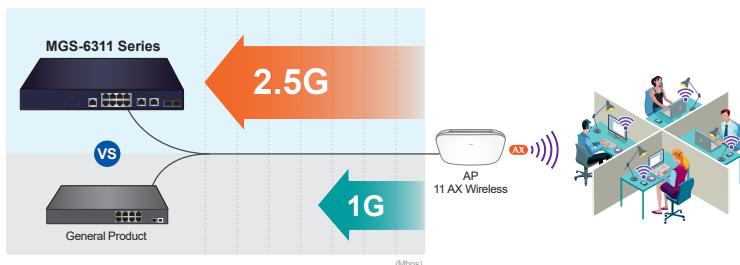

10GBASE-T and 10GBASE-X SFP Dual Media Interfaces for Diversified Bandwidth Applications

PLANET MGS-6311-10T2X has the capability to reach a high speed of 10Gbps over copper or fiber-optic cabling which helps to accelerate the performance of large data transmission. The built-in 10GBASE-T copper interfaces support 5-speed (10G/5G/2.5G/1G/100) auto-negotiation, and 10Gbps data transmission with the existing Cat6A/Cat7 UTP cabling, meaning the speed can be increased without costs. It can definitely give you the speed you demand and its Plug and Play makes installation easy.

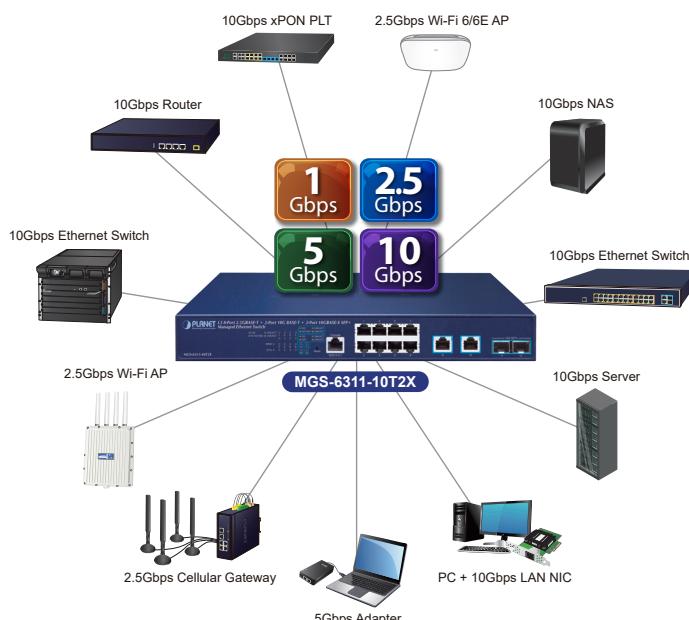

Quality of Service

- 8 priority queues on all switch ports
- Support for strict priority and WRR (Weighted Round Robin) CoS policies
- Traffic classification
 - IEEE 802.1p CoS/ToS
 - IPv4/IPv6 DSCP
 - Port-based WRR
- Strict priority and WRR CoS policies

Multicast

- Supports IPv4 IGMP snooping v1, v2 and v3
- Supports IPv6 MLD v1 and v2 snooping
- Querier mode support
- Supports Multicast VLAN Register (MVR)

Security

- IEEE 802.1x port-based network access authentication
- MAC-based network access authentication
- Built-in RADIUS client to cooperate with the RADIUS servers for IPv4 and IPv6
- TACACS+ login users access authentication
- IP-based Access Control List (ACL)
- MAC-based Access Control List
- Supports DHCP snooping
- Supports ARP inspection
- IP Source Guard prevents IP spoofing attacks
- Dynamic ARP Inspection discards ARP packets with invalid MAC address to IP address binding

Management

- Management IP for IPv4 and IPv6
- Switch Management Interface
 - Console/Telnet Command Line Interface
 - Web switch management
 - SNMP v1, v2c, and v3 switch management
 - SSHv2/TLSv1.2 secure access
- BOOTP and DHCP for IP address assignment
- Firmware upload/download via TFTP or HTTP Protocol for IPv4 and IPv6
- SNTP (Simple Network Time Protocol) for IPv4 and IPv6
- User privilege levels control



The fiber-optic 10GBASE-X SFP+ interfaces of the MGS-6311 series support dual speeds, 10GBASE-SR/LR and 1000BASE-SX/LX, meaning the administrator now can flexibly choose the suitable SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently.

Remote Management Solution with NMS

The MGS-6311 series with the NMS helps IT staff remotely manage all network devices and monitor PDs' operational statuses. Thus, they are designed for both the enterprises and industries where deployments of PDs can be as remote as possible, without having to go to the actual location once a bug or faulty condition is found. With the NMS, all kinds of businesses can now be speedily and efficiently managed from one platform.



Redundant Ring, Fast Recovery for Critical Network Applications

The MGS-6311 series supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced ITU-T **G.8032 ERPS** (Ethernet Ring Protection Switching) technology and Spanning Tree Protocol (802.1s MSTP) into customer's network to enhance system reliability and uptime in harsh environments. In a certain simple Ring network, the recovery time could be less than 15ms to quickly bring the network back to normal operation.

- Syslog server for IPv4 and IPv6
- Supports DDM
- Four RMON groups 1, 2, 3, 9 (history, statistics, alarms and events)
- Supports sFlow
- Supports ULDP
- Supports ULPP (Uplink Protection Protocol)
- Supports ULSM (Uplink State Monitor protocol)
- Supports LLDP/LLDP MED
- Supports DHCP Option82/43/60/61/67
- Supports ONVIF device discovery and device quick link.
- Supports ping, trace route function for IPv4 and IPv6
- PLANET Smart Discovery Utility for deployment management
- Support PLANET NMS and CloudNMS for centralized deployment and management


Power over Ethernet

For MGS-6311-8UP4X

- Complies with IEEE 802.3bt/at/af Power over Ethernet Plus
- Up to 8 ports of IEEE 802.3bt/at/af devices powered
- Supports PoE power up to 95 watts for each PoE port
- Supports maximum 240-watt PoE budget

For MGS-6311-8P2X

- Complies with IEEE 802.3at/af Power over Ethernet Plus
- Up to 8 ports of IEEE 802.3at/af devices powered
- Supports PoE power up to 32 watts for each PoE port
- Supports maximum 150-watt PoE budget
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100 meters
- PoE management
 - Total PoE power budget control
 - Per port PoE function enable/disable
 - PoE port power feeding priority
 - Per PoE port power limitation
 - PD classification detection
 - PoE schedule

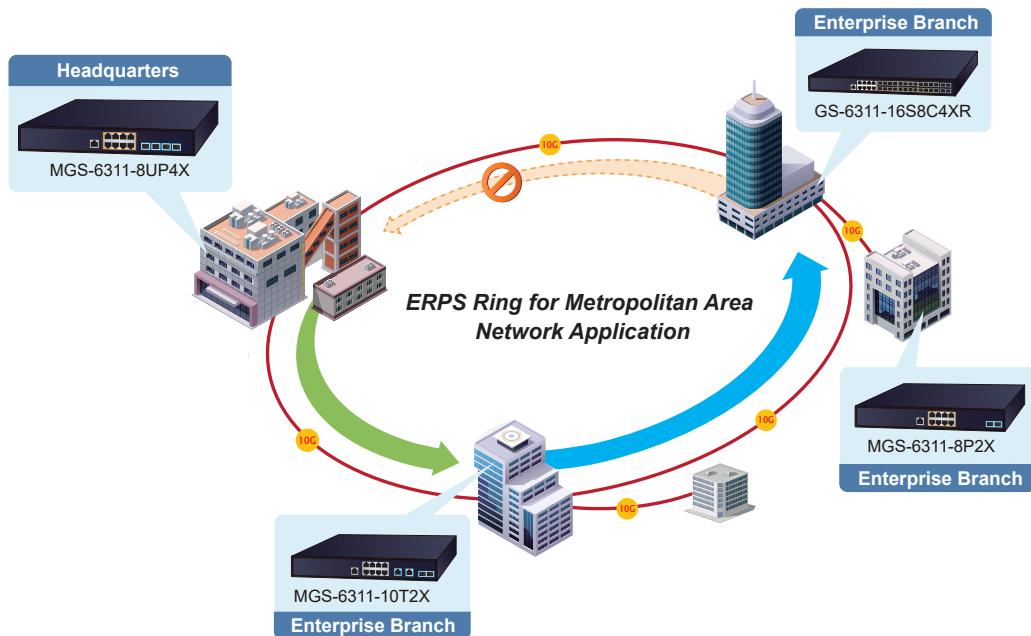

Layer 3 Routing Support

The MGS-6311 series enables the administrator to conveniently boost network efficiency by configuring Layer 3 static routing manually, and automatically configuring **RIP** (Routing Information Protocol), **OSPF** (Open Shortest Path First), and **VRP** (Virtual Router Redundancy Protocol) for gateway redundancy.

- The RIP can employ the hop count as a routing metric and prevent routing loops by implementing a limit on the number of hops allowed in a path from the source to a destination.
- The OSPF is an interior dynamic routing protocol for autonomous system based on link state. The protocol creates a database for link state by exchanging link states among Layer 3 switches, and then uses the Shortest Path First algorithm to generate a route table based on that database.
- The VRRP can provide default gateway redundancy by allowing multiple Layer 3 switches to share a virtual IP address. When the master device becomes unavailable, a backup device can automatically take over the virtual gateway role, ensuring continuous network connectivity and high availability

Strong Multicast


The MGS-6311 series supports abundant multicast features. In Layer 2, it features IPv4 IGMPv1/v2/v3 snooping and IPv6 MLD v1/v2 snooping. With Multicast VLAN Register (MVR), multicast receiver/sender control and illegal multicast source detect functions which make the MGS-6311 series great for any robust networking.

Full IPv6 Support

The MGS-6311 series provides **IPv6 management** and enterprise-level secure features such as **SSH**, **ACL**, **WRR** and **RADIUS** authentication. It thus helps the enterprises to step in the IPv6 era with the lowest investment. In addition, you don't need to replace the network facilities when the IPv6 FTTx edge network is built.

Robust Layer 2 Features

The MGS-6311 series supports basic switch management functions such as port speed configuration, port aggregation, VLANs, Multiple Spanning Tree Protocol (MSTP), bandwidth control, and IGMP snooping. The MGS-6311 series provides 802.1Q tagged VLAN, Q-in-Q, voice VLAN, and GVRP protocol functions. By supporting port aggregation, the MGS-6311 series allows the operation of high-speed trunks combined with multiple ports. It supports up to 64 trunk groups with a maximum of 8 ports per group.

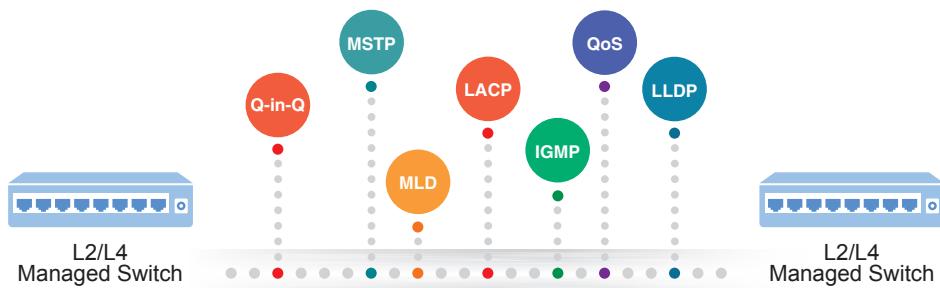

Excellent Layer 2 to Layer 4 Traffic Control

The MGS-6311 series is loaded with powerful traffic management and WRR features to enhance services offered by telecoms. The WRR functionalities include wire-speed Layer 4 traffic classifiers and bandwidth limitation which are particularly useful for multi-tenant unit, multi-business unit, Telco, or network service applications. It also empowers the enterprises to take full advantage of the limited network resources and guarantees the best in VoIP and video conferencing transmission.

Powerful Network Security

The MGS-6311 series offers comprehensive Layer 2 to Layer 4 Access Control List (ACL) for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP address, TCP/UDP ports or defined typical network applications. Its protection mechanism also comprises 802.1x Port-based, MAC-based and web-based user and device authentications, which can be deployed with RADIUS, to ensure the port level security and block illegal users.

Advanced IP Network Protection


The MGS-6311 series also provides DHCP Snooping, IP Source Guard and Dynamic ARP Inspection functions to prevent IP snooping from attack and discard ARP packets with invalid MAC address. The network administrators can now construct highly-secure corporate networks with considerably less time and effort than before.

Efficient and Secure Management

For efficient management, the MGS-6311 series is equipped with console, Web and SNMP management interfaces.


- With the built-in Web-based management interface, the MGS-6311 series offers an easy-to-use, platform-independent management and configuration facility.
- For text-based management, the MGS-6311 series can be accessed via Telnet or the console port. To reduce product learning time, it offers Cisco-like commands, and customers do not need to learn new commands for these switches.
- For standard-based monitor and management software, it offers SNMPv3 connection which encrypts the packet content at each session for secure remote management.

Moreover, the MGS-6311 series offers secure remote management by supporting SSHv2 connection which encrypts the packet content at each session.

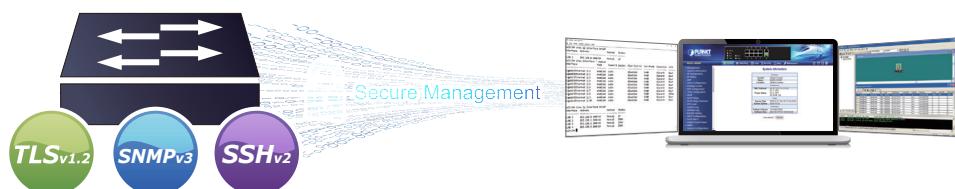


Intelligent SFP Diagnosis Mechanism

The MGS-6311 series supports **SFP-DDM (Digital Diagnostic Monitor)** function that greatly helps network administrator to easily monitor real-time parameters of the SFP and SFP+ transceivers, such as optical output power, optical input power, temperature, laser bias current, and transceiver supply voltage.

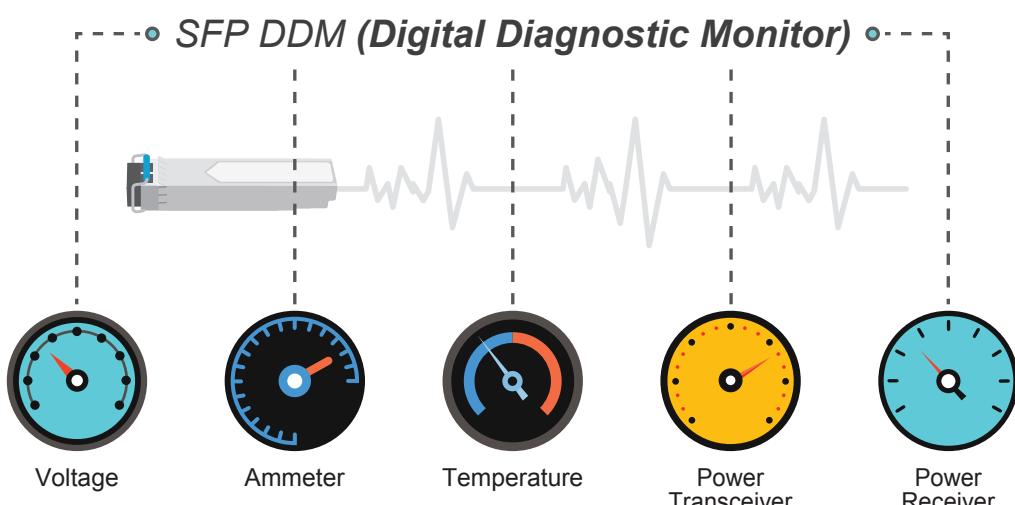


Full-Power IEEE 802.3bt PoE++ for Next-Generation High-Power Applications

The MGS-6311-8UP4X features 8 10/100/1000/2500BASE-T Gigabit IEEE 802.3bt PoE++ ports, delivering up to **95 watts** per port with a total PoE power budget of **240 watts** (max.), while the MGS-6311-8P2X provides 8 10/100/1000/2500BASE-T Gigabit IEEE 802.3at PoE+ ports, delivering up to **32 watts** per port with a total PoE power budget of **150 watts** (max.). Designed for PoE VoIP phones and various PoE IP cameras, the switches integrate power and data transmission over a single Ethernet cable, enabling centralized power management, reducing installation costs, and shortening deployment time.

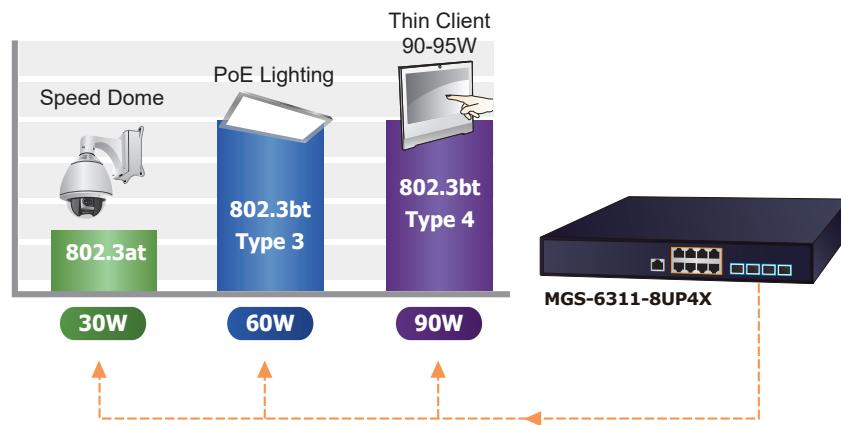


Intelligent Powered Device Alive Check

The MGS-6311-8P2X and MGS-6311-8UP4X can monitor the status of connected PDs in real time via the PD alive check function. If a PD stops operating or responding, the switch will restore PoE power to the PD, allowing it to resume normal operation. This feature greatly enhances network reliability by resetting the PD's power via the PoE port and reduces the administrator's management burden.

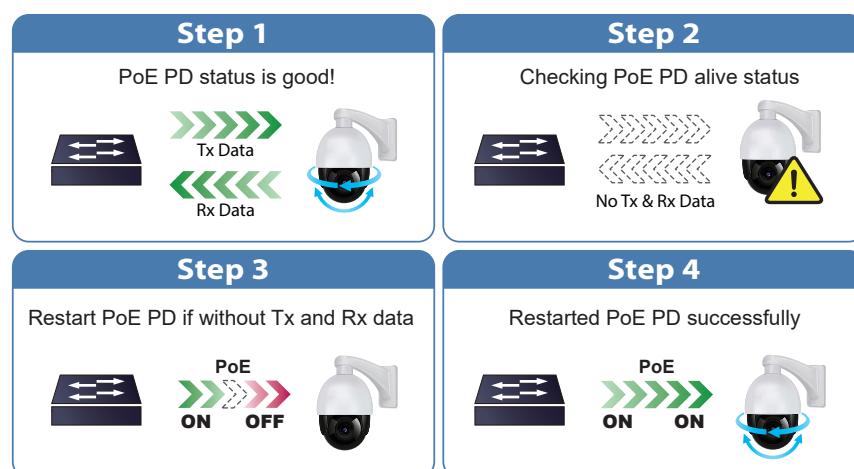

PoE Schedule for Energy Savings

Besides IP surveillance, the MGS-6311-8P2X and MGS-6311-8UP4X are also suitable for building PoE networks, including VoIP and wireless LAN. In response to global energy-saving initiatives and environmental protection efforts, the switches can effectively manage power supply while still delivering high wattage. The PoE Schedule function allows each PoE port to be enabled or disabled during specified time intervals, helping SMBs and enterprises save energy and reduce costs.

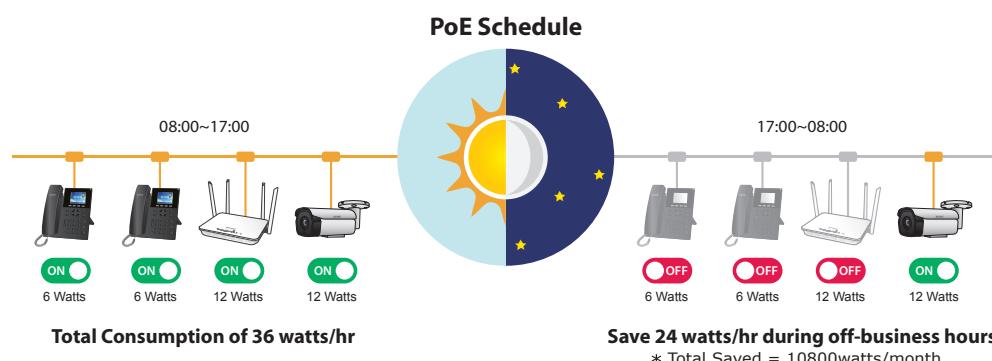


Applications

Excellent Solution to Enterprise Security and QoS Switch

The MGS-6311 series performs 80/120 Gigabits per second non-blocking switch fabric, so it can easily provide a local 10Gbps high bandwidth Ethernet network for the backbone of your department. With the built-in SFP+ ports, the MGS-6311 series provides the uplink to the backbone network through the 10G Ethernet LR/SR SFP+ modules. It further improves the network efficiency and protects the network clients by offering the security and QoS features.


High Performance Server Service

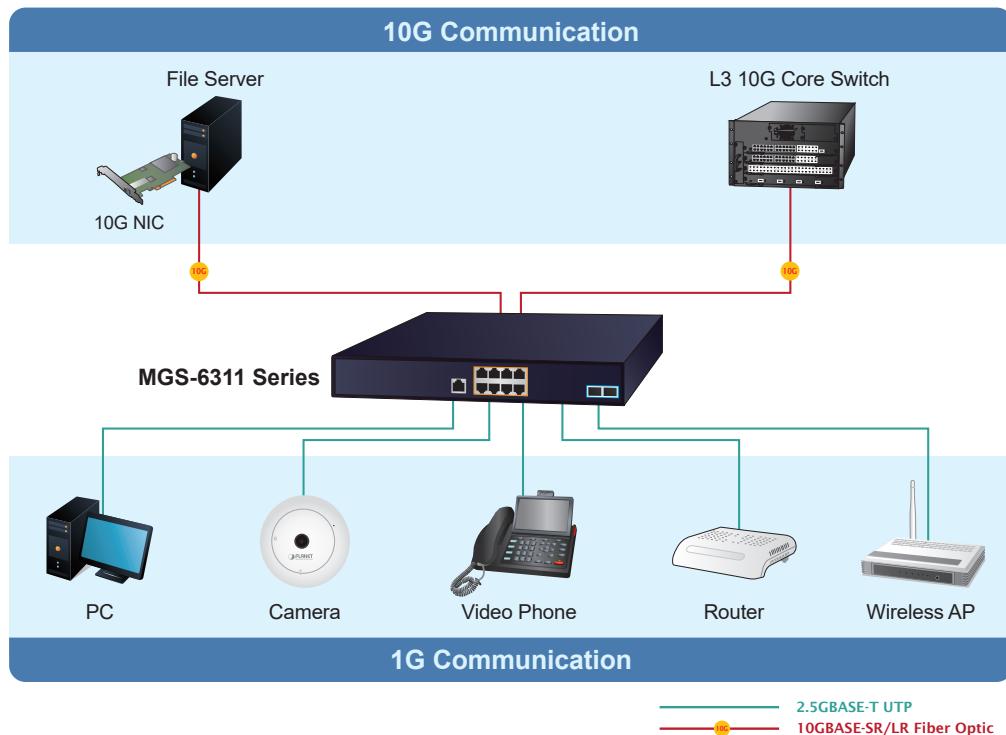

Layer 3 VLAN Routing


With the built-in robust Layer 3 traffic routing protocols, the MGS-6311 series ensures reliable routing between VLANs and network segments. The routing protocols can be applied via VLAN interface. The MGS-6311 series is certainly a cost-effective and ideal solution for enterprises.

VLAN Routing + 10G Uplink Applications

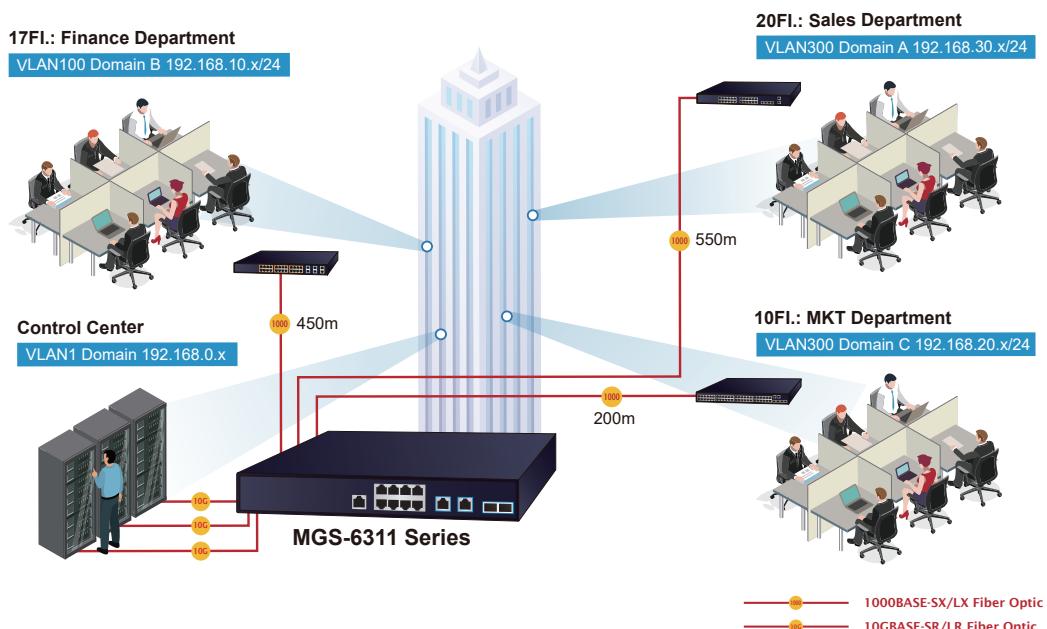

High Availability Mesh Networking Solution for Big Data System

With highly-flexible, highly-extensible and easy-to-install features, the MGS-6311 series offers up to 80/120Gbps data exchange speed via optical fiber interface and the transmission distance can be extended to 120km. The MGS-6311 series features strong, rapid, self-recovery capability to prevent interruptions and external intrusions. It incorporates **IEEE 802.1s MSTP (Multiple Spanning Tree Protocol, spanning tree by VLAN)** into customer's automation network to enhance system reliability and uptime. The MGS-6311 series is the ideal solution for data centers, service providers and telecoms to build redundant connection and establish high bandwidth for **Big Data** server farm.

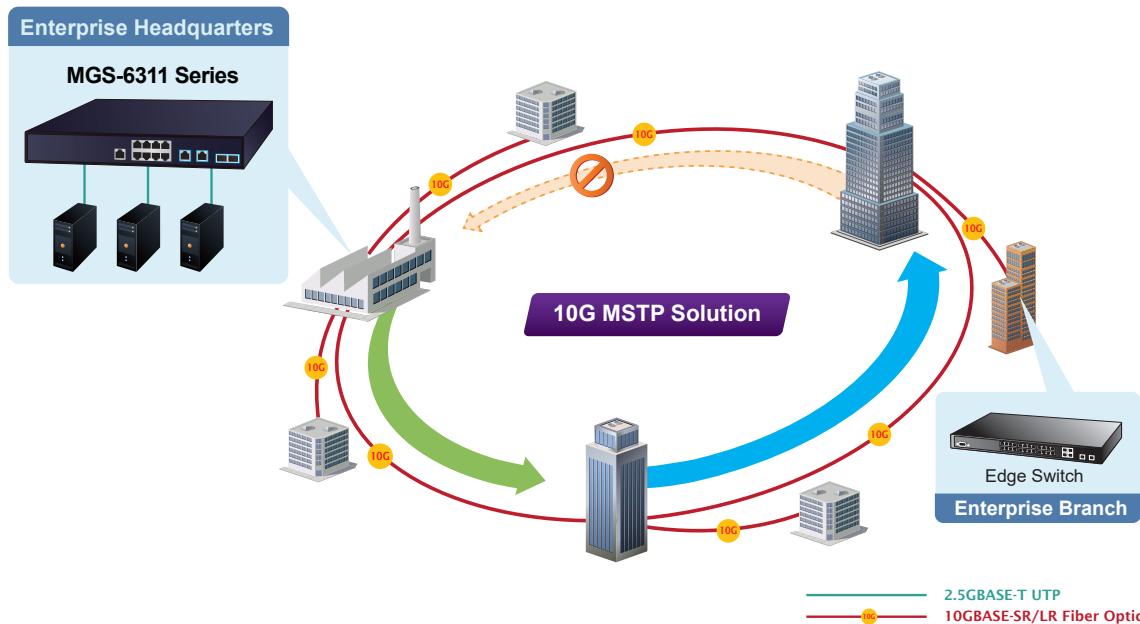

Specifications

Product	MGS-6311-8P2X	MGS-6311-8UP4X	MGS-6311-10T2X
Hardware Specifications			
10/100/1000/2500 RJ45 Ports	8	8	8
100/1G/2.5G/5G/10G RJ45 Ports	--	--	2
	2	4	2
10G SFP+ Ports	10GBASE-SR/LR SFP+ interface Backward compatible with 1G/2.5GBASE-SX/LX/BX SFP transceiver		
Console Port	1 x RJ45-to-RS232 serial port (9600, 8, N, 1)		
CPU	MIPS 800MHz		
RAM	512Mbytes	4Gbytes	512Mbytes
Flash Memory	32Mbytes		
ESD Protection	Contact ±6KV , Air ±8KV		
Surge Protection	Differential mode ±2KV , Common mode ±4KV		
Dimensions (W x D x H)	330 x 230 x 43.6 mm, 1U height	330 x 230 x 43.6 mm, 1U height	330 x 230 x 43.6 mm, 1U height
Weight	2172g	2510g	1953g
	10.7 watts / 36.4BTU (System)	10.4 watts / 35.46BTU (System)	10.4 watts / 35.46BTU (System)
Power Consumption	174 watts/ 593.3 BTU (System+PoE)	280 watts/ 954.8 BTU (System+PoE)	26.6 watts/ 90.7 BTU (System Full loading)
Power Requirements- AC	AC 100~240V, 50/60Hz	AC 100~240V, 50/60Hz	AC 100~240V, 50/60Hz
Fan	1	2 (Smart FAN)	1

LED	System: PWR (Green), SYS (Green)	System: PWR (Green), SYS (Green)	System: PWR (Green), SYS (Green)
	Ports: Per 2.5GBASE-T RJ45 Ports: 2500Mbps LNK/ACT (Green) 10/100/1000Mbps LNK/ACT (Amber) 802.3at/af PoE-in-Use (Amber)	Ports: Per 2.5GBASE-T RJ45 Ports: 10/100/1000/2500Mbps LNK/ACT (Green) 802.3bt/at/af PoE-in-Use (Amber)	Ports: Per 2.5GBASE-T RJ45 Ports: 2500Mbps LNK/ACT (Green) 10/100/1000Mbps LNK/ACT (Amber)
	Per 10GBASE-X SFP Ports: 10G LNK/ACT (Green) 1G LNK/ACT (Amber)	Per 10GBASE-X SFP Ports: 1G/2.5G/10G LNK/ACT (Green)	Per 10GBASE-X SFP Ports: 10G LNK/ACT (Green) 1G LNK/ACT (Amber)
Switching Specifications			
Switch Architecture	Store-and-forward	Store-and-forward	Store-and-forward
Switch Fabric	80Gbps/non-blocking	120Gbps/non-blocking	120Gbps/non-blocking
Switch Throughput	59.52Mpps	89.28Mpps	89.28Mpps
Address Table	16K MAC address table with auto learning function	16K MAC address table with auto learning function	16K MAC address table with auto learning function
ARP Table	8K	8K	8K
Routing Table	6K	6K	6K
IP Interface	1024	1024	1024
ACL Table	4K	4K	4K
Shared Data Buffer	12Mbit	12Mbit	12Mbit
Multicast Table	1K	1K	1K
Jumbo Frame	12KBytes		
Flow Control	Back pressure for half duplex IEEE 802.3x pause frame for full duplex		
Power over Ethernet Specifications			
PoE Standard	IEEE 802.3at PoE+ PSE	IEEE 802.3bt PoE++ PSE	--
PoE Power Supply Type	End-span	End-span/Mid-span/802.3bt	--
PoE Power Output	32W(max.)	95W(max.)	--
Power Pin Assignment	1/2(-), 3/6(+)	1/2(-)3/6(+), 4/5(+)7/8(-)	--
PoE Power Budget	150 watts (max.)	240 watts (max.)	--
IPv4 Layer 3 Functions			
IP Routing Protocol	VRRP v1, v2, v3 Static route RIPv1/v2 OSPFv2 BGP4 Hardware-based Layer 3 routing		
Layer 3 Protocol	ARP ARP Proxy IGMP Proxy		
IPv6 Layer 3 Functions			
IP Routing Protocol	IPv6 Static Route RIPng OSPFv3 BGP6 (BGP4+) PIM6 IPv6 RA (Router Advertisement) IPv6 LPM Routing Hardware-based Layer 3 routing SNMP over IPv6 Support IPv6 IPSec Support IPv6 ACL		
Other	ICMPv6,ND,DNSv6 DNS over IPv6 Support		

Layer 2 Functions	
Port Configuration	EEE Green energy savings disable/enable Port disable/enable Flow control disable/enable Bandwidth control on each port Port loopback detect
Port Status	Display each port's speed duplex mode, link status, flow control status and auto negotiation status
VLAN	802.1Q tagged VLAN, up to 4K VLAN groups 802.1ad Q-in-Q (VLAN stacking) GVRP for VLAN management Private VLAN Edge (PVE) supported Protocol-based VLAN MAC-based VLAN IP subnet VLAN
Spanning Tree Protocol	STP, IEEE 802.1D (Classic Spanning Tree Protocol) RSTP, IEEE 802.1w (Rapid Spanning Tree Protocol) MSTP, IEEE 802.1s (Multiple Spanning Tree Protocol, spanning tree by VLAN) Supports BPDU and root guard, BPDU Filtering and BPDU Forwarding
Bandwidth Control	TX/RX/Both
Link Aggregation	IEEE 802.3ad LACP/static trunk Supports 64 groups with 8 ports per trunk group
Ring	Supports ERPS, and complies with ITU-T G.8032 Recovery time < 15ms @ 3 nodes Recovery time < 50ms @ 16 nodes Supports major ring and sub-ring.
QoS	8 priority queues on all switch ports Supports strict priority and Weighted Round Robin (WRR) CoS policies Traffic classification: - IEEE 802.1p CoS/ToS - IPv4/IPv6 DSCP - Port-based WRR
Multicast	IPv4 IGMP v1/v2/v3 snooping IPv4 Querier mode support IPv6 MLD v1/v2 snooping Multicast VLAN Register (MVR) Up to 1024
Security Functions	
Access Control List	Supports Standard and Expanded ACL IP-based ACL/MAC-based ACL Time-based ACL Up to 4K entries
Security	Port isolation Supports IP + MAC + port binding Identification and filtering of L2/L3/L4 based ACL Defend against DOS or TCP attacks Suppression of broadcast, multicast and unknown unicast packet DHCP Snooping, DHCP Option 82/43/60/61/67 Command line authority control based on user levels
AAA	TACACS+ and IPv4/IPv6 over RADIUS
Authentication	IEEE 802.1x port-based network access control MAC-based authentication
Switch Management Functions	
System Configuration	Console, Telnet, Web browser, SNMP v1, v2c
Secure Management Interfaces	SSHv2, TLSv1.2, SNMPv3

	IPv4 and IPv6 dual stack management SNMP over IPv6 Support User IP security inspection for IPv4/IPv6 SNMP SNMP v1, v2c and v3 SNMP MIB and TRAP SNMP RMON 1, 2, 3, 9 four groups HTTP over IPv6 Support IPv4/IPv6 FTP/TFTP IPv4/IPv6 SNTP/NTP Supports ping, trace route function for IPv4 and IPv6 RADIUS authentication for IPv4/IPv6 Telnet user name and password IPv4/IPv6 SSH IPv4/IPv6 Telnet IPv6 Radius+ Support The right configuration for users to adopt RADIUS server's shell management CLI, console, Telnet Security IP safety net management function: avoid unlawful landing at nonrestrictive area Syslog server for IPv4 and IPv6 IPv6 TACACS+ support PLANET Smart Discovery Utility PLANET NMS controller and CloudNMS supported
Management	ONVIF device discovery ONVIF device quick link
ONVIF	RFC 1213 MIB-II RFC 1215 Internet Engineering Task Force RFC 1271 RMON RFC 1354 IP-Forwarding MIB RFC 1493 Bridge MIB RFC 1643 Ether-like MIB RFC 1907 SNMP v2 RFC 2011 IP/ICMP MIB RFC 2012 TCP MIB RFC 2013 UDP MIB RFC 2096 IP forward MIB RFC 2233 if MIB RFC 2452 TCP6 MIB RFC 2454 UDP6 MIB RFC 2465 IPv6 MIB RFC 2466 ICMP6 MIB RFC 2573 SNMP v3 notify RFC 2574 SNMP v3 vacm RFC 2674 Bridge MIB Extensions (IEEE 802.1Q MIB) RFC 2674 Bridge MIB Extensions (IEEE 802.1P MIB) RFC 3635 Ethernet-like MIB RFC 2863 Interface Group MIB RFC 2819 RMON (1, 2, 3,9) RFC 1493 Bridge MIB Power over Ethernet MIB
SNMP MIBs	Standard Conformance
Regulatory Compliance	FCC Part 15 Class A, CE

	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3z Gigabit 1000BASE-SX/LX IEEE 802.3ab Gigabit 1000BASE-T IEEE 802.3bz Gigabit 2.5G, 5GBASE-T IEEE 802.3an Gigabit 10GBASE-T IEEE 802.3ae 10Gb/s Ethernet IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1ag CFM IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1X port authentication network control IEEE 802.1ab LLDP Standards Compliance IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet PLUS IEEE 802.3bt Power over Ethernet PLUS PLUS RFC 768 UDP RFC 783 TFTP RFC 793 TCP RFC 791 IP RFC 792 ICMP RFC 2068 HTTP RFC 1112 IGMP v1 RFC 2236 IGMP v2 RFC 3376 IGMP v3 RFC 2710 MLD v1 RFC 3810 MLD v2 RFC 2328 OSPF v2 RFC 1058 RIP v1 RFC 2453 RIP v2 ITU-T G.8032 ERPS Ring
Environment	
Operating	Temperature: 0 ~ 50 degrees C Relative Humidity: 5 ~ 90% (non-condensing)
Storage	Temperature: -10 ~ 70 degrees C Relative Humidity: 5 ~ 90% (non-condensing)

Ordering Information

MGS-6311-8P2X	L3 8-Port 2.5GBASE-T 802.3at PoE + 2-Port 10GBASE-X SFP+ Managed Ethernet Switch (150W)
MGS-6311-8UP4X	L3 8-Port 2.5GBASE-T 802.3bt PoE + 4-Port 10GBASE-X SFP+ Managed Ethernet Switch (240W)
MGS-6311-10T2X	L3 8-Port 2.5GBASE-T + 2-Port 10GBASE-T + 2-Port 10GBASE-X SFP+ Managed Ethernet Switch

Related Products

XGS-6311-12X	Layer 3 12-Port 10GBASE-X SFP+ Managed Ethernet Switch
XGS-6311-8T4XR	L3 8-Port 10GBASE-T + 4-Port 10GBASE-X SFP+ Managed Ethernet Switch with Dual 100~240V AC Redundant Power
GS-6311-24T4X	L3 24-Port 10/100/1000T + 4-Port 10G SFP+ Managed Ethernet Switch
GS-6311-24HP4X	L3 8-Port 802.3bt PoE + 16-Port 802.3at PoE + 4-Port 10G SFP+ Managed Ethernet Switch
GS-6311-24P4XV	L3 24-Port 10/100/1000T 802.3at PoE + 4-Port 10G SFP+ Managed Ethernet Switch with Smart LCD Screen
GS-6311-24PL4X	L3 24-Port 10/100/1000T 802.3at PoE + 4-Port 10G SFP+ Managed Ethernet Switch
GS-6311-16S8C4XR	L3 16-Port 100/1000X SFP + 8-Port Gigabit TP/SFP + 4-Port 10G SFP+ Managed Ethernet Switch with 36-72V DC Redundant Power
GS-6311-48T6X	L3 48-Port 10/100/1000T + 6-Port 10G SFP+ Managed Ethernet Switch
GS-6311-48P6X	L3 48-Port 10/100/1000T 802.3at PoE + 6-Port 10G SFP+ Managed Ethernet Switch
XGS-6350-48X2Q4C	Layer 3 48-Port 10G SFP+ + 2-Port 40G QSFP+ + 4-Port 100G QSFP28 Managed Switch
MGS-6311-24UPL6X	L3 24-Port 2.5GBASE-T 802.3bt PoE + 6-Port 10GBASE-X SFP+ Managed Ethernet Switch

Available Modules for MGS-6311 series

10Gigabit Ethernet Transceiver

MTB-LA10	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 10km (TX:1270nm RX:1330nm)
MTB-LB10	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 10km (TX:1330nm RX:1270nm)
MTB-LA20	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1270nm RX:1330nm)
MTB-LB20	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 20km (TX:1330nm RX:1270nm)
MTB-LA40	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1270nm RX:1330nm)
MTB-LB40	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 40km (TX:1330nm RX:1270nm)
MTB-LA60	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1270nm RX:1330nm)
MTB-LB60	1-Port 10GBASE-BX SFP+ Fiber Optic Module - 60km (TX:1330nm RX:1270nm)
MTB-RJ	1-Port 10GBASE-T SFP+ Copper Fiber Optic Module - 30m
MTB-SR	1-Port 10GBASE-SR SFP+ Fiber Optic Module - 300m
MTB-SR2	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 2km
MTB-LR	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 10km
MTB-LR20	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 20km
MTB-LR40	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 40km
MTB-LR60	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 60km
MTB-LR80	1-Port 10GBASE-LR SFP+ Fiber Optic Module - 80km

2.5Gigabit Ethernet Transceiver

MGB-2GSR	2.5G SFP Transceiver (Multi-mode, 850nm, DDM, 0~70 degrees C) - 300m
MGB-2GLA20	2.5G SFP Transceiver (Single mode WDM, TX:1310nm RX:1550nm, DDM, 0~70 degrees C) - 20km
MGB-2GLB20	2.5G SFP Transceiver (Single mode WDM, TX:1550nm RX:1310nm, DDM, 0~70 degrees C) - 20km
MGB-2GLR20	2.5G SFP Transceiver (Single mode, 1310nm, DDM) - 20km
MGB-2GLR2	2.5G SFP Transceiver (Single mode, 1310nm, DDM) - 2km

Gigabit Ethernet Transceiver (1000BASE-X SFP)

MGB-GT	SFP-Port 1000BASE-T Module
MGB-LX	SFP-Port 1000BASE-LX mini-GBIC module - 20km
MGB-SX	SFP-Port 1000BASE-SX mini-GBIC module - 550m
MGB-SX2	SFP-Port 1000BASE-SX mini-GBIC module - 2km
MGB-L40	SFP-Port 1000BASE-LX mini-GBIC module - 40km
MGB-L80	SFP-Port 1000BASE-LX mini-GBIC module - 80km
MGB-L120	SFP-Port 1000BASE-LX mini-GBIC module - 120km
MGB-LA10	SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 10km
MGB-LB10	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 10km
MGB-LA20	SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 20km
MGB-LB20	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 20km
MGB-LA40	SFP-Port 1000BASE-BX (WDM, TX:1310nm) mini-GBIC module - 40km
MGB-LB40	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 40km
MGB-LA80	SFP-Port 1000BASE-BX (WDM, TX:1490nm) mini-GBIC module - 80km
MGB-LB80	SFP-Port 1000BASE-BX (WDM, TX:1550nm) mini-GBIC module - 80km