
USW-KM302

2 Ports USB Mouse Roaming KM Switch

with USB 3.2 Gen 1, Hotkey Control, Independent USB & Audio Switching



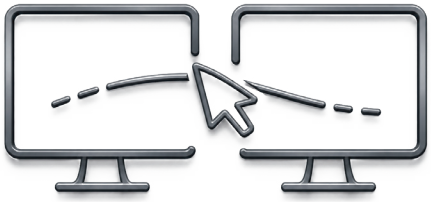

Mouse Roaming

Features

- **2-Port Mouse Roaming USB KM Switch** Controls 2 PCs with KB/MS, and Moves the Cursor across Screens to Switch Control Automatically
  Continue Cursor Tracktion Ensures Accurate Cursor Position when Moving among PCs
  Mouse Roaming Layouts Supports 2×1 and 1×2 Provides Vertical and Horizontal Screen Arrangement Options for Dual-PC Setups
  Mouse Speed Management Adjusts Cursor Speed Settings to Match Different Monitor Sizes, Resolutions, and User Preferences
- **3 Flexible Switching Control Methods** :
  - Hotkey Control
  - Mouse Roaming
  - Front Push Buttons
- **Audio / USB Ports Independent Switching** Allows Each of Them Either Follow KB/MS-Focus or Stick to a Certain PC
  Front USB 3.2 Empowers Easy Access
- **Plug-and-Play** Requires No Driver / Software Install
- **Compact Metal Housing** for Desktop and Professional Installations

Specification

Model	USW-KM302
PC Interfaces	
USB 3.2 Gen 1 (B)	USB 3.2 x 2 (5Gbps)
Speaker	3.5mm SPK x 2 (In)
Console Interfaces	
USB 3.2 Gen 1 (A)	Front USB 3.2 x 1 (5Gbps) Rear USB 3.2 x 1 (5Gbps) Front USB HID x 1 (Hotkey) Rear USB HID x 3 (Hotkey)
Speaker	3.5mm SPK x 1 (Out)
Switch Methods	Push Button Control Mouse Roaming Hotkey Control
Mouse Roaming Layouts	2 x 1 ; 1 x 2 (with Mouse Speed Management)
Other Functions	USB / SPK Independent Switch
Material ; Power Supply	Metal ; DC 9-12V
H x W x D (mm) ; Weight	34 x 160 x 100 ; 488g

Connection Pattern

